

CELP

VOICE CHANNEL MODULES

OVERVIEW The CELP (Codebook Excited Linear Predictive coding) voice channel modules bring superior quality voice plus an up to 13:1 compression ratio to General DataComm's TMS™ (Transport Management System) and OCM (Office Communications Manager) products. Modules can be configured to support compressed voice at channel operating rates of 9.6, 6.4, or 4.8 Kbps. Users gain the best in voice quality using high speed digital services while saving on monthly line costs. In addition, rates can be dynamically downspeeded to accommodate link restoration rerouting with only a slight adjustment in voice quality.

As an option, the CELP modules can recognize and transmit facsimile signals uncompressed to remote CELP modules. This automatic bypass feature is transparent to the user, yielding support for full rate Group III fax at 9.6 Kbps.

Module versions are available with or without fax bypass for the TMS 3000 and the OCM 2000/1000 Office Communications Managers. Flexible signaling choices

include 2-wire/4-wire E&M (Type 1, Type 2, Type 5, and SSDC5A), 2-wire FXS, and 2-wire FXO. DTMF (Dual Tone

Multi-Frequency) signaling is supported by each CELP module. Since all signaling systems are carried in-band and do not require extra bandwidth, "hidden" bandwidth costs are eliminated.

BANDWIDTH CONSERVATION The use of digital services to bring voice and facsimile traffic from


remote offices onto the corporate backbone network has become increasingly important, especially for today's growing multinational network

applications. However, despite the dramatic decline in tariffs for digital services in recent years, international links continue to be relatively expensive, providing greater incentive for bandwidth efficiency. Line cost savings and overall better bandwidth management, the mission of GDC's


TMS family, is furthered by using the CELP family's bandwidth-conserving capabilities.

Installed on a TMS or OCM, CELP modules provide compression ratios of up to 13 to 1. With a CELP module operating at 9.6 Kbps, for example, users gain three times as many voice/fax channels as with a 32 Kbps ADPCM module over a single 56 or 64 Kbps or FT1/T1/E1 circuit. Compared to uncompressed voice, 9.6 Kbps CELP delivers six times as many channels. The end results are more efficient use of bandwidth and significant line cost savings.

FREE VOICE Users typically purchase a full 56/64 Kbps, FT1, or T1/E1 line when using the OCM for their LAN and data requirements. With the

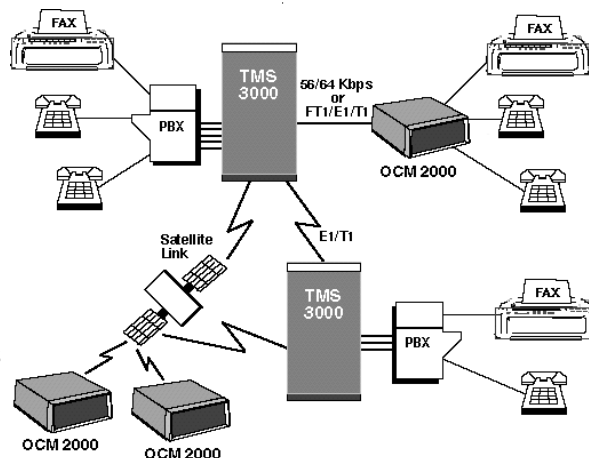

ADVANCED VOICE COMPRESSION FOR TMS AND OCM

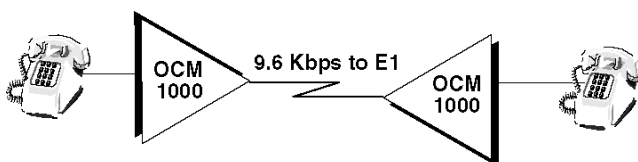

POINT-TO-POINT ANALOG-TO-ANALOG VOICE CONNECTIONS

CELP module, high quality voice support can be added at the same time for a negligible amount of bandwidth expenditure and at no extra line cost. Configured in the OCM, the CELP module requires as little as 4.8 Kbps of bandwidth to provide voice connectivity.

PRODUCT HIGHLIGHTS

Maximum conservation of bandwidth resources

High quality voice as validated by DAM test scores

Selectable rates of 9.6, 6.4, 4.8 Kbps

"Free" voice when used on the OCM

Adaptive downspeeding avoids service disruption

Optional full Group III fax bypass

In-band signaling eliminates hidden bandwidth costs


CELP

VOICE CHANNEL MODULE

SUPERIOR VOICE QUALITY Measured using the DAM (Diagnostic Acceptability Measure) test, a repeatable and reliable independent testing method, the 9.6 and 6.4 CELP modules consistently scored higher in signal and background quality, intelligibility, pleasantness and overall acceptability ratings than other compression methods. In fact, CELP at 9.6 Kbps offers about the same quality as ADPCM at 32 Kbps.

ADAPTIVE DOWNSPEEDING After rerouting around a failed link, or in the event of network congestion, there may be insufficient bandwidth to carry a channel at full speed. Like other TMS channel modules, the CELP can be configured to automatically down-speed when bandwidth availability is reduced. With adaptive downspeeding, users will experience only a temporary adjustment in voice circuit quality instead of a disruptive loss of service.

FAX BYPASS An optional fax bypass feature capability, completely transparent to the user, allows CELP modules to detect and automatically route fax signals around the compression algorithms. A fax machine con-

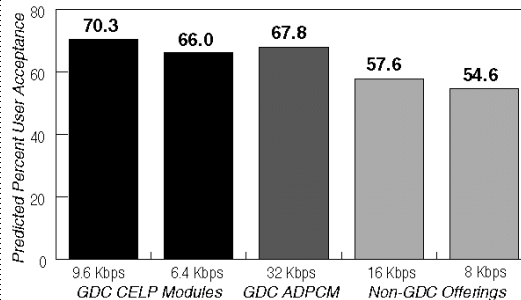

DAM TEST SCORES

nected to a CELP module configured for 9.6 Kbps will transport images at the full 9.6 Kbps Group III fax rate, or at a Group III rate of 4.8 Kbps if the module is configured for 6.4 Kbps.

VERSATILE APPLICATIONS The CELP modules can be used wherever an interface is needed to analog voice or fax equipment in OCM and TMS locations. They are ideal for point-to-point voice connections between analog PBX and PBX tie lines or PBX and Key Systems, and for Dealer Board applications. Or, they can be used by carriers to deploy Off Premises Extensions and Private Line Automatic Ringdown (PLAR) applications.

SPECIFICATIONS

Packaging Formats:	TMS channel format OCM channel format
Voice Compression Method:	Codebook Excited Linear Predictive
Software/Firmware Requirements	
<i>TMS-3000:</i>	GTS V2.1
<i>OCM-2000:</i>	GTS V2.1
<i>OCM-1000:</i>	V1.3 or higher
Channel Operating Rates:	Selectable 9.6, 6.4, and 4.8 Kbps
Fax Data Rates:	Group III fax at 9.6 and 4.8 Kbps

Versions Available

	Voice Only	Voice and Fax	
	Channel Rates (Kbps)	Channel Rates (Kbps)	Fax Rates (Kbps)
<i>TMS CELP, 4-wire, E&M</i>	4.8	4.8, 6.4	6.4
<i>TMS CELP 9.6, 4-wire, E&M</i>	4.8, 9.6	4.8, 6.4, 9.6	6.4, 9.6
<i>OCM CELP, 2-wire, FXS</i>	4.8	4.8, 6.4	6.4
<i>OCM CELP, 2-wire, FXO</i>	4.8	4.8, 6.4	6.4
<i>OCM CELP, 2/4-wire, E&M</i>	4.8	4.8, 6.4	6.4
<i>OCM CELP, 9.6, 2-wire, FXS</i>	4.8, 9.6	4.8, 6.4, 9.6	6.4, 9.6
<i>OCM CELP 9.6, 2-wire, FXO</i>	4.8, 9.6	4.8, 6.4, 9.6	6.4, 9.6
<i>OCM CELP 9.6, 2/4-wire, E&M</i>	4.8, 9.6	4.8, 6.4, 9.6	6.4, 9.6

WORLD HEADQUARTERS
Middlebury, Connecticut USA 06762-1299
Tel: 1-203-574-1118
Fax: 1-203-758-8507
1-203-758-9518 (GDC International)
TELEX: 7400905

U.S. Business Systems Sales Offices

Atlanta, GA (404) 955-0682
Boston, MA (617) 622-5900
Chicago, IL (708) 261-0670
Cleveland, OH (216) 642-1190
Dallas, TX (214) 980-0803
Denver, CO (303) 782-3600
Detroit, MI (810) 540-4110
Hartford, CT (203) 574-1118
Los Angeles, CA (310) 348-5200
New York, NY (212) 248-7220
Philadelphia, PA (609) 663-0755
San Francisco, CA (510) 769-4500
Tampa, FL (813) 286-7879
Washington, DC (301) 595-0300

U.S. Telecomm Sales Offices

Atlanta, GA (404) 955-0682
Chicago, IL (708) 261-0670
Dallas, TX (214) 980-0803
Denver, CO (303) 782-3606
Detroit, MI (810) 540-4110
Honolulu, HI (808) 988-5409
Los Angeles, CA (818) 506-8897
Kirkland, WA (206) 820-9451
Minneapolis, MN (612) 831-8611
Pennsauken, NJ (609) 663-0755
San Francisco, CA (510) 769-4500
St. Louis, MO (314) 537-1333
Washington, DC (301) 595-0300

For the name of your distributor in the United States, contact: U.S. Distributor Sales, (203) 574-1118

For 24-hour delivery, call GDC QUICKSHIPPERS at 1-800-432-2228

U.S. Government Sales

Washington, DC (703) 904-1211

SUBSIDIARIES

Australia

Sydney
Tel: 61-2-956-5099
Fax: 61-2-956-5083

Canada

Willowdale, Ontario
Tel: (416) 498-5100
Fax: (416) 499-0248

France

Paris
Tel: 33-1-48-133301
Fax: 33-1-48-203918

Mexico

Mexico City
Tel: 52-5-645-2238
Fax: 52-5-645-5976

United Kingdom

Wokingham, Berkshire
Tel: 44-1-734-774-868
Fax: 44-1-734-774-871

Russia

St. Petersburg
Tel: 7-812-119-1085
Fax: 7-812-119-1086

INTERNATIONAL REGIONAL OFFICES

Asia

Singapore
Tel: 65-735-2123
Fax: 65-735-6889
Hong Kong
Tel: 852-25265511
Fax: 852-25259944

China
Tel: 86-10-5002266
Fax: 86-10-5002022

Japan
Tel: 81-3-3862-1730
Fax: 81-3-3862-6326

Europe/Africa/Middle East

France
Tel: 33-1-48-133470
Fax: 33-1-42-430021

Germany
Tel: 49-69-950840
Fax: 49-69-5073259

Latin America

Argentina
Tel: 54-1-814-1391/1393
Fax: 54-1-814-1846

Brazil
Tel: 55-11-535-0232
Fax: 55-11-542-0547

Miami, Florida
Tel: 1-305-749-2109
Fax: 1-305-749-0595

For the name and address of your local distributor, contact your nearest area office or General DataComm International Headquarters

All specifications subject to change without notice.

© General DataComm (1995)
All Rights Reserved

® Registered trademark of General DataComm Industries, Inc.

General DataComm, GDC, and the GDC logo are trademarks of General DataComm, Inc.

All other trademarks and registered trademarks are the property of their respective owners.

